




Leading Through Innovation



Global Cutting Tool Leader **YG-1**

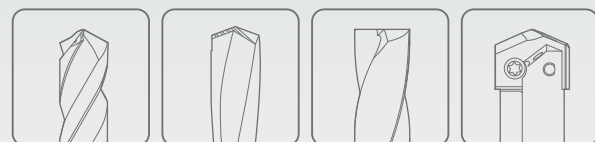

HOLEMAKING



SOLID CARBIDE & HSSCo8

NC-SPOTTING DRILLS

NC-ANBOHRER

- For Centering and Chamfering of Holes
- Zum Zentrieren und Anfasen von Bohrungen

SELECTION GUIDE



SOLID CARBIDE & HSSCo8
NC-SPOTTING
DRILLS

For Centering and Chamfering of Holes



Please visit
globalyg1.com/mat
for material search

◎ : Excellent ○ : Good

Recommended cutting conditions : p.A286

ISO	VDI 3323	Material Description	Composition / Structure / Heat Treatment		HB	HRC					
P	1	Non-alloy steel	About 0.15% C		125		◎	◎	◎	◎	◎
	2		About 0.45% C		190	13	◎	◎	◎	◎	◎
	3		About 0.45% C		250	25	◎	◎	◎	◎	◎
	4		About 0.75% C		270	28					
	5		About 0.75% C		300	32					
	6	Low alloy steel	Annealed		180	10	◎	◎	◎	◎	◎
	7		Quenched & Tempered		275	29	○	○	○	○	○
	8		Quenched & Tempered		300	32					
	9		Quenched & Tempered		350	38					
	10		Annealed		200	15					
	11		Quenched & Tempered		325	35					
M	12	Stainless steel	Ferritic / Martensitic	Annealed	200	15	○	○	○	○	○
	13		Martensitic	Quenched & Tempered	240	23					
	14		Austenitic		180	10					
K	15	Grey cast iron	Pearlitic / ferritic		180	10	◎	◎	◎	◎	◎
	16		Pearlitic (Martensitic)		260	26	○	○	○	○	○
	17	Nodular cast iron	Ferritic		160	3	○	○	○	○	○
	18		Pearlitic		250	25					
	19	Malleable cast iron	Ferritic		130		○	○	○	○	○
N	20		Pearlitic		230	21					
	21	Aluminum-wrought alloy	Not Curable		60		○	○	○	○	○
	22		Curable Hardened		100		○	○	○	○	○
	23	Aluminum-cast, alloyed	≤ 12% Si, Not Curable		75		○	○	○	○	○
	24		≤ 12% Si, Curable Hardened		90						
	25		> 12% Si, Not Curable		130						
	26	Copper and Copper Alloys (Bronze / Brass)	Cutting Alloys, PB>1%		110						
	27		CuZn, CuSnZn (Brass)		90						
	28	Non Metallic Materials	CuSn, lead-free copper and electrolytic copper		100						
	29		Duroplastic, Fiber Reinforced Plastic								
	30		Rubber, Wood, etc.								
S	31	Heat Resistant Super Alloys	Fe Based	Annealed	200	15					
	32			Cured	280	30					
	33		Ni or Co Based	Annealed	250	25					
	34			Cured	350	38					
	35	Titanium Alloys	Cast		320	34					
	36		Pure Titanium		400 Rm		○	○			
	37		Alpha + Beta Alloys Hardened		1050 Rm						
H	38	Hardened steel	Hardened		550	55					
	39		Hardened		630	60					
	40	Chilled Cast Iron	Cast		400	42					
	41	Hardened Cast Iron	Hardened		550	55					

NC-SPOTTING DRILLS

D5306 SERIES


D5307 SERIES

CARBIDE, NC-SPOTTING DRILLS 90°, 120°

VOLLHARTMETALL NC-ANBOHRER 90°, 120°
Forets carbure à pointer NC 90°, 120°
PUNTE IN MD A CENTRARE NC 90°, 120°

Application : For more precise centering work on NC/CNC machines.
The large diameter of the tool permits chamfering work after centering continuously.

Verwendung : Auf NC-Maschinen, Lehrenbohrwerken u.a. kapitalintensiven Bohrwerken, zum Zentrieren und Anfasen von Gewindebohrungen in einem Arbeitsgang. Besonders geeignet zum Anbohren von hochfesten Stählen, Stahlguß, Grauguß, Hartguß, Mangan-Hartstahl, CrNi-Stählen, Bronze, Leicht-und Buntmetallen.

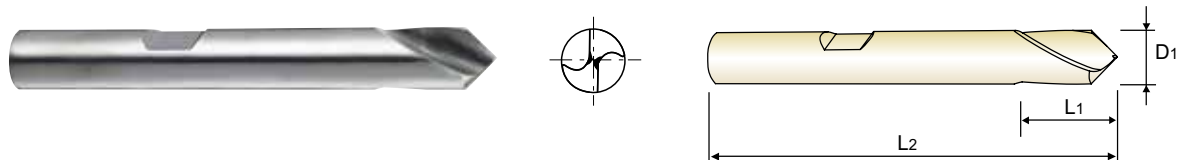

p.A286

Plain Shank	Page
NC DRILL CHUCK & OTHER TOOL HOLDERS	D247 - 256
ER COLLET CHUCK	D73 - 115

NC-Spotting drills 90°
NC-Anbohrer 90°

EDP No.	Drill Diameter	Flute Length	Overall Length
	D1	L1	L2
D5306060	6.0	13	50
D5306080	8.0	23	60
D5306100	10.0	24	70
D5306120	12.0	24	70
D5306160	16.0	29	75
D5306200	20.0	35	100

NC-Spotting drills 120°
NC-Anbohrer 120°

EDP No.	Drill Diameter	Flute Length	Overall Length
	D1	L1	L2
D5307060	6.0	13	50
D5307080	8.0	23	60
D5307100	10.0	24	70
D5307120	12.0	24	70
D5307160	16.0	29	75
D5307200	20.0	35	100

Unit : mm

TiN(D6306, D6307), TiCN(DG306, DG307) and TiAlN(DH306, DH307) are available on your request.

◎ : Excellent ○ : Good


ISO	P										M				K					
Material Description	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel				Stainless steel			Grey cast iron	Nodular cast iron	Malleable cast iron
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRC	125	13	25	28	32	10	29	32	38	15	35	15	23	10	10	26	3	25	21	
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommended	◎	◎	◎			◎	○				○				◎	○	○		○	
ISO	N										S					H				
Material Description	Aluminum-wrought alloy					Aluminum-cast, alloyed					Copper and Copper Alloys (Bronze / Brass)					Non Metallic Materials				
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40
HRC	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400
Recommended	○	○	○													○				

CARBIDE, NC-SPOTTING DRILLS 142°

- VOLLHARTMETALL NC-ANBOHRER 142°
- Forets carbure à pointer NC 142°
- PUNTE IN MD A CENTRARE NC 142°

►Application : For more precise centering work on NC/CNC machines.
The large diameter of the tool permits chamfering work after centering continuously.

►Verwendung : Auf NC-Maschinen, Lehrenbohrwerken u.a. kapitalintensiven Bohrwerken, zum Zentrieren und Anfasen von Gewindebohrungen in einem Arbeitsgang. Besonders geeignet zum Anbohren von hochfesten Stählen, Stahlguß, Grauguß, Hartguß, Mangan-Hartstahl, CrNi-Stählen, Bronze, Leicht-und Buntmetallen.

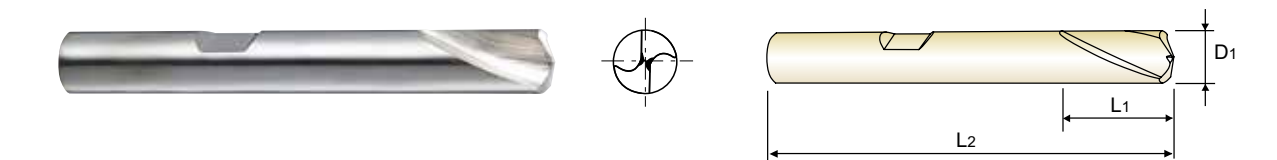

CARBIDE

DIN 6535HB

h6

142°

Bright



p.A286

Recommended ToolHolder	Plain Shank	Page
	◎ NC DRILL CHUCK & OTHER TOOL HOLDERS	D247 - 256
○	ER COLLET CHUCK	D73 - 115

NC-Spotting drills 142° NC-Anbohrer 142°

EDP No.	Drill Diameter	Flute Length	Overall Length
	D1	L1	L2
● D5320030	3.0	8	32
● D5320040	4.0	10	40
● D5320050	5.0	13	50
D5320060	6.0	13	50
D5320080	8.0	23	60
D5320100	10.0	24	70
D5320120	12.0	24	70
D5320160	16.0	29	75
D5320200	20.0	35	100

● with plain shank


◎ : Excellent ○ : Good																						
ISO	P										M				K							
Material Description	Non-alloy steel					Low alloy steel				High alloyed steel, and tool steel		Stainless steel			Grey cast iron		Nodular cast iron		Malleable cast iron			
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20		
HRc		13	25	28	32	10	29	32	38	15	35	15	23	10	10	26	3	25		21		
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230		
Recommended	◎	◎	◎			◎	○					○			◎	○	○		○			
ISO	N										S						H					
Material Description	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)			Non Metallic Materials		Heat Resistant Super Alloys				Titanium Alloys		Hardened steel		Chilled Cast Iron		Hardened Cast Iron	
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	
HRc											15	30	25	38	34	36	37	55	60	42	55	
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550	
Recommended	○	○	○													○						

HSSCo8, NC-SPOTTING DRILLS 90°

- HSSCo8, NC-ANBOHRER 90°
- Forets HSSCo8 à pointer NC 90°
- PUNTE A CENTRARE NC 90°, HSSCo8

►Application : For more precise centering work on NC/CNC Machines.
The large diameter of the tool permits chamfering work after centering continuously.

►Verwendung : Für positionsgenaueres und schnelles Anbohren mit NC/CNC-Maschinen und Bearbeitungszentren, die Ausführung mit Spitzenwinkel 90° ermöglicht sowohl ein Zentrieren, als auch das Vorborenen für einen nächstgrößeren Durchmesser.

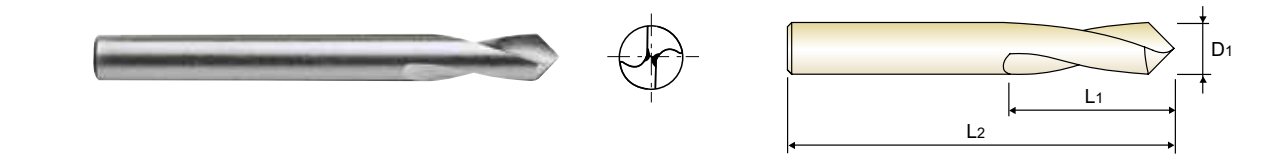

NC

HSS Co8

h6

h6

90°

Bright



p.A286

Recommended ToolHolder	Plain Shank	Page
	◎ NC DRILL CHUCK & OTHER TOOL HOLDERS	D247 - 256
○	ER COLLET CHUCK	D73 - 115

LONG LENGTH

EDP No.	Drill Diameter	Flute Length	Overall Length
	D1	L1	L2
D2306030	3.0	12	46
D2306040	4.0	12	55
D2306050	5.0	15	60
D2306060	6.0	20	66
D2306080	8.0	25	79
D2306100	10.0	25	89
D2306120	12.0	30	102
D2306160	16.0	35	115
D2306200	20.0	40	131

► TiN, TiCN and TiAlN are available on your request.

EDP No.	Drill Diameter	Flute Length	Overall Length
	D1	L1	L2
D2321030	3.0	12	80
D2321040	4.0	12	100
D2321050	5.0	15	120
D2321060	6.0	20	140
D2321080	8.0	25	140
D2321100	10.0	25	170
D2321120	12.0	30	170
D2321160	16.0	35	200
D2321200	20.0	40	200

◎ : Excellent ○ : Good																							
ISO	P										M				K								
Material Description	Non-alloy steel					Low alloy steel				High alloyed steel, and tool steel		Stainless steel			Grey cast iron		Nodular cast iron		Malleable cast iron				
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20			
HRc		13	25	28	32	10	29	32	38	15	35	15	23	10	10	26	3	25		21			
HB		125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	230			
Recommended	◎	◎	◎			◎	○					○				◎	○	○		○			
ISO	N										S										H		
Material Description	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)			Non Metallic Materials		Heat Resistant Super Alloys					Titanium Alloys		Hardened steel		Chilled Cast Iron	Hardened Cast Iron		
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41		
HRc											15	30	25	38	34	36	37	55	60	42	55		
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550		
Recommended	○	○	○																				

CARBIDE

HSS

i-ONE
DRILLS

i-DREAM
DRILLS

DREAM
DRILLS
-PRO

DREAM
DRILLS
-GENERAL

DREAM
DRILLS
-HIGH FEED

DREAM
DRILLS
-FLAT BOTTOM

DREAM
DRILLS
-INOX

DREAM
DRILLS
-ALU

DREAM
DRILLS
-MQL

DREAM DRILLS
for HIGH
HARDENED STEELS

GENERAL
CARBIDE
DRILLS

MULTI-1
DRILLS

HPD
DRILLS

GOLD-P
DRILLS

SUPER-GP
DRILLS

STRAIGHT
SHANK
DRILLS

TAPER SHANK
DRILLS

NC-
SPOTTING
DRILLS

CENTER
DRILLS

SPADE
DRILLS

REAMERS

COUNTER
SINKS

COUNTER
BORES

TECHNICAL
DATA



RECOMMENDED CUTTING CONDITIONS
EMPFOHLENE SCHNEIDPARAMETER

D5306, D5307, D5320 SERIES

CARBIDE, NC-SPOTTING DRILLS

V.C. = M/MIN
RPM = rev./min.
FEED = mm/rev.

ISO	VDI 3323	Material Description	Vc	Parameter	Drill Diameter (mm)									
					2.0	3.0	4.0	6.0	8.0	10.0	12.0	16.0	20.0	
P	1	Non-alloy steel	75	RPM	11940	7960	5970	3980	2980	2390	1990	1490	1190	
				FEED	0.02-0.04	0.04-0.06	0.05-0.08	0.07-0.10	0.08-0.12	0.09-0.14	0.11-0.17	0.13-0.19	0.15-0.21	
	2		70	RPM	11140	7430	5570	3710	2790	2230	1860	1390	1110	
				FEED	0.02-0.04	0.04-0.06	0.05-0.08	0.07-0.10	0.08-0.12	0.09-0.14	0.11-0.17	0.13-0.19	0.15-0.21	
	3	65	RPM	10350	6900	5170	3450	2590	2070	1720	1290	1030		
			FEED	0.01-0.03	0.03-0.05	0.04-0.07	0.05-0.08	0.07-0.10	0.08-0.12	0.09-0.14	0.11-0.17	0.13-0.19		
	6	Low alloy steel	70	RPM	11140	7430	5570	3710	2790	2230	1860	1390	1110	
FEED				0.02-0.04	0.04-0.06	0.05-0.08	0.07-0.10	0.08-0.12	0.09-0.14	0.11-0.17	0.13-0.19	0.15-0.21		
55			RPM	8750	5840	4380	2920	2190	1750	1460	1090	880		
	FEED		0.01-0.03	0.03-0.05	0.04-0.07	0.05-0.08	0.07-0.10	0.08-0.12	0.09-0.14	0.11-0.17	0.13-0.19			
M	12		Stainless steel	35	RPM	5570	3710	2790	1860	1390	1110	930	700	560
					FEED	0.02-0.04	0.04-0.06	0.05-0.08	0.07-0.10	0.08-0.12	0.09-0.14	0.11-0.17	0.13-0.19	0.15-0.21
K	15	Grey cast iron	90	RPM	14320	9550	7160	4770	3580	2860	2390	1790	1430	
				FEED	0.03-0.05	0.05-0.07	0.06-0.09	0.08-0.11	0.10-0.13	0.12-0.16	0.15-0.20	0.18-0.24	0.22-0.28	
	16		70	RPM	11140	7430	5570	3710	2790	2230	1860	1390	1110	
				FEED	0.01-0.03	0.03-0.05	0.04-0.07	0.05-0.08	0.07-0.10	0.08-0.12	0.09-0.14	0.11-0.17	0.13-0.19	
	17	Nodular cast iron	90	RPM	14320	9550	7160	4770	3580	2860	2390	1790	1430	
				FEED	0.03-0.05	0.05-0.07	0.06-0.09	0.08-0.11	0.10-0.13	0.12-0.16	0.15-0.20	0.18-0.24	0.22-0.28	
19	Malleable cast iron	60	RPM	9550	6370	4770	3180	2390	1910	1590	1190	950		
			FEED	0.03-0.05	0.05-0.07	0.06-0.09	0.08-0.11	0.10-0.13	0.12-0.16	0.15-0.2	0.18-0.24	0.22-0.28		
N	21	Aluminum-wrought alloy	165	RPM	26260	17510	13130	8750	6570	5250	4380	3280	2630	
				FEED	0.04-0.06	0.06-0.09	0.08-0.11	0.10-0.13	0.12-0.15	0.15-0.19	0.18-0.23	0.21-0.27	0.25-0.31	
	22		130	RPM	20690	13790	10350	6900	5170	4140	3450	2590	2070	
				FEED	0.04-0.06	0.06-0.09	0.08-0.11	0.10-0.13	0.12-0.15	0.15-0.19	0.18-0.23	0.21-0.27	0.25-0.31	
	23	Aluminum-cast, alloyed	110	RPM	17510	11670	8750	5840	4380	3500	2920	2190	1750	
S	36	Titanium Alloys	35	RPM	5570	3710	2790	1860	1390	1110	930	700	560	
				FEED	0.01-0.03	0.03-0.05	0.04-0.06	0.05-0.08	0.07-0.10	0.08-0.12	0.09-0.14	0.11-0.17	0.13-0.19	

D2320, D2321, D2322, D2323, D2306, D2307 SERIES

HSSCo8, NC-SPOTTING DRILLS

ISO	VDI 3323	Material Description	Vc	Parameter	Drill Diameter (mm)								
					2.0	3.0	4.0	6.0	8.0	10.0	12.0	16.0	20.0
P	1	Non-alloy steel	25	RPM	3980	2650	1990	1330	990	800	660	500	400
				FEED	0.02-0.04	0.04-0.06	0.05-0.08	0.07-0.10	0.08-0.12	0.09-0.14	0.11-0.17	0.13-0.19	0.15-0.21
	2		25	RPM	3980	2650	1990	1330	990	800	660	500	400
				FEED	0.02-0.04	0.04-0.06	0.05-0.08	0.07-0.10	0.08-0.12	0.09-0.14	0.11-0.17	0.13-0.19	0.15-0.21
	3	15	RPM	2390	1590	1190	800	600	480	400	300	240	
			FEED	0.01-0.03	0.03-0.05	0.04-0.07	0.05-0.08	0.07-0.10	0.08-0.12	0.09-0.14	0.11-0.17	0.13-0.19	
	6	Low alloy steel	20	RPM	3180	2120	1590	1060	800	640	530	400	320
FEED				0.02-0.04	0.04-0.06	0.05-0.08	0.07-0.10	0.08-0.12	0.09-0.14	0.11-0.17	0.13-0.19	0.15-0.21	
15			RPM	2390	1590	1190	800	600	480	400	300	240	
	FEED		0.01-0.03	0.03-0.05	0.04-0.07	0.05-0.08	0.07-0.10	0.08-0.12	0.09-0.14	0.11-0.17	0.13-0.19		
M	12	Stainless steel	15	RPM	2390	1590	1190	800	600	480	400	300	240
				FEED	0.02-0.04	0.04-0.06	0.05-0.08	0.07-0.10	0.08-0.12	0.09-0.14	0.11-0.17	0.13-0.19	0.15-0.21
K	15	Grey cast iron	30	RPM	4770	3180	2390	1590	1190	950	800	600	480
				FEED	0.03-0.05	0.05-0.07	0.06-0.09	0.08-0.11	0.10-0.13	0.12-0.16	0.15-0.20	0.18-0.24	0.22-0.28
	16		25	RPM	3980	2650	1990	1330	990	800	660	500	400
				FEED	0.01-0.03	0.03-0.05	0.04-0.07	0.05-0.08	0.07-0.10	0.08-0.12	0.09-0.14	0.11-0.17	0.13-0.19
	17	Nodular cast iron	30	RPM	4770	3180	2390	1590	1190	950	800	600	480
				FEED	0.03-0.05	0.05-0.07	0.06-0.09	0.08-0.11	0.10-0.13	0.12-0.16	0.15-0.20	0.18-0.24	0.22-0.28
19	Malleable cast iron	20	RPM	3180	2120	1590	1060	800	640	530	400	320	
			FEED	0.03-0.05	0.05-0.07	0.06-0.09	0.08-0.11	0.10-0.13	0.12-0.16	0.15-0.20	0.18-0.24	0.22-0.28	
N	21	Aluminum-wrought alloy	65	RPM	10350	6900	5170	3450	2590	2070	1720	1290	1030
				FEED	0.04-0.06	0.06-0.09	0.08-0.11	0.10-0.13	0.12-0.15	0.15-0.19	0.18-0.23	0.21-0.27	0.25-0.31
	22		60	RPM	9550	6370	4770	3180	2390	1910	1590	1190	950
				FEED	0.04-0.06	0.06-0.09	0.08-0.11	0.10-0.13	0.12-0.15	0.15-0.19	0.18-0.23	0.21-0.27	0.25-0.31
	23	Aluminum-cast, alloyed	50	RPM	7960	5310	3980	2650	1990	1590	1330	990	800
FEED				0.04-0.06	0.06-0.09	0.08-0.11	0.10-0.13	0.12-0.15	0.15-0.19	0.18-0.23	0.21-0.27	0.25-0.31	