



Leading Through Innovation



SOLID CARBIDE, HSS & HSS-E

CENTER DRILLS

ZENTRIERBOHRER

- For General Purpose
- Für allgemeine Anwendungen

CARBIDE
HSS
i-ONE DRILLS
i-DREAM DRILLS
DREAM DRILLS -PRO
DREAM DRILLS -GENERAL
DREAM DRILLS -HIGH FEED
DREAM DRILLS -FLAT BOTTOM
DREAM DRILLS -INOX
DREAM DRILLS -ALU
DREAM DRILLS -MQL
DREAM DRILLS for HIGH HARDENED STEELS
GENERAL CARBIDE DRILLS
MULTI-1 DRILLS
HPD DRILLS
GOLD-P DRILLS
SUPER-GP DRILLS
STRAIGHT SHANK DRILLS
TAPER SHANK DRILLS
NC- SPOTTING DRILLS
CENTER DRILLS
SPADE DRILLS
REAMERS
COUNTER SINKS
COUNTER BORES
TECHNICAL DATA

SELECTION GUIDE



SERIES
TOOL MATERIAL
TYPE
SIZE MIN
SIZE MAX
PAGE

D5303	DV303	DV333
CARBIDE	HSS-E	HSS-E
FORM A	FORM A	FORM A
D1.0	D0.5	D1.6
D6.3	D6.3	D6.3
A290	A291	

SURFACE TREATMENT

Bright		
--------	--	--

SOLID CARBIDE, HSS & HSS-E
CENTER
DRILLS

For General Purpose



Please visit
globalyg1.com/mat
for material search


◎ : Excellent ○ : Good

Recommended cutting conditions : p.A297

ISO	VDI 3323	Material Description	Composition / Structure / Heat Treatment		HB	HRc			
P	1	Non-alloy steel	About 0.15% C	Annealed	125		◎	◎	◎
	2		About 0.45% C	Annealed	190	13	◎	◎	◎
	3		About 0.45% C	Quenched & Tempered	250	25	◎	○	○
	4		About 0.75% C	Annealed	270	28			
	5		About 0.75% C	Quenched & Tempered	300	32			
	6	Low alloy steel		Annealed	180	10	◎	◎	◎
	7			Quenched & Tempered	275	29	○	○	○
	8			Quenched & Tempered	300	32			
	9			Quenched & Tempered	350	38			
	10	High alloyed steel, and tool steel		Annealed	200	15			
	11			Quenched & Tempered	325	35			
M	12	Stainless steel	Ferritic / Martensitic	Annealed	200	15	○	○	○
	13		Martensitic	Quenched & Tempered	240	23			
	14		Austenitic		180	10			
K	15	Grey cast iron	Pearlitic / ferritic		180	10	◎	◎	◎
	16		Pearlitic (Martensitic)		260	26	○	○	○
	17	Nodular cast iron	Ferritic		160	3	○	○	○
	18		Pearlitic		250	25			
	19	Malleable cast iron	Ferritic		130		○	○	○
	20		Pearlitic		230	21			
N	21	Aluminum-wrought alloy	Not Curable		60				
	22		Curable		100				
	23	Aluminum-cast, alloyed	≤ 12% Si, Not Curable		75				
	24		≤ 12% Si, Curable		90				
	25		> 12% Si, Not Curable		130				
	26	Copper and Copper Alloys	Cutting Alloys, PB>1%		110				
	27		CuZn, CuSnZn (Brass)		90				
	28	(Bronze / Brass)	CuSn, lead-free copper and electrolytic copper		100				
	29	Non Metallic Materials	Duroplastic, Fiber Reinforced Plastic						
	30		Rubber, Wood, etc.						
S	31	Heat Resistant Super Alloys	Fe Based	Annealed	200	15			
	32			Cured	280	30			
	33		Ni or Co Based	Annealed	250	25			
	34			Cured	350	38			
	35			Cast	320	34			
	36	Titanium Alloys	Pure Titanium		400 Rm				
	37		Alpha + Beta Alloys		1050 Rm				
H	38	Hardened steel			550	55			
	39				630	60			
	40	Chilled Cast Iron			400	42			
	41	Hardened Cast Iron			550	55			

DV334	D1303	D1343	D1313	D1353	D1363	D1373	DV383
HSS-E	HSS	HSS	HSS	HSS	HSS	HSS	HSS-E
FORM A	FORM A	FORM A	FORM B	FORM B	FORM R	FORM R	FORM R
D1.0	D0.5	D0.5	D1.0	D2.0	D0.5	D0.8	D1.6
D5.0	D10.0	D8.0	D6.3	D6.3	D8.0	D5.0	D6.3
A292	A293		A294		A295		A296

Bright							
--------	--	--	--	--	--	--	--

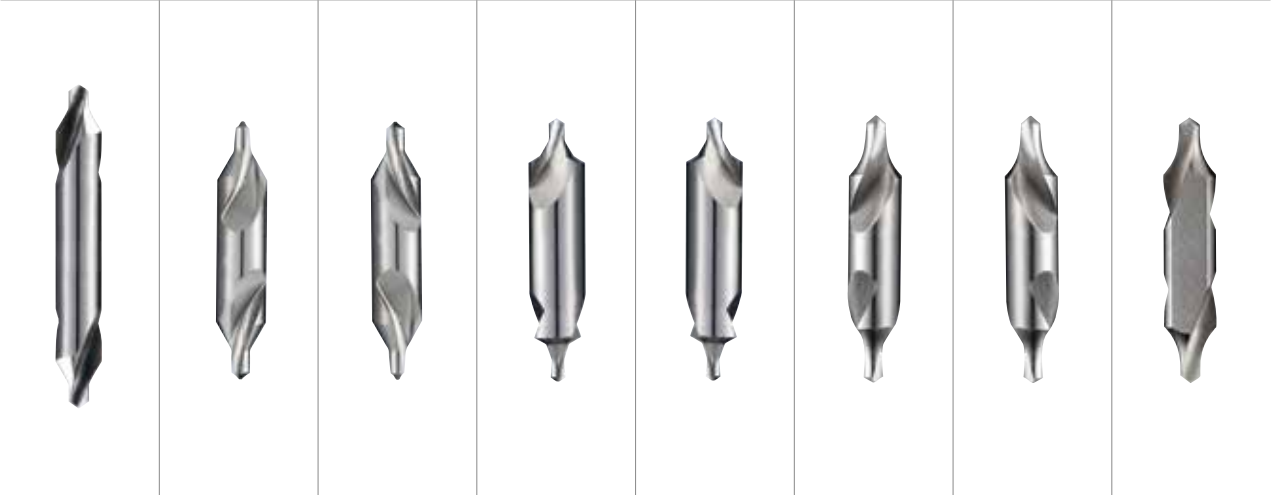

◎	◎	◎	◎	◎	◎	◎	◎	1
◎	◎	◎	◎	◎	◎	◎	◎	2
○	○	○	○	○	○	○	○	3
								4
								5
◎	◎	◎	◎	◎	◎	◎	◎	6 P
○	○	○	○	○	○	○	○	7
								8
								9
								10
								11
○	○	○	○	○	○	○	○	12
								13 M
								14
◎	◎	◎	◎	◎	◎	◎	◎	15
○	○	○	○	○	○	○	○	16
○	○	○	○	○	○	○	○	17 K
								18
○	○	○	○	○	○	○	○	19
								20
								21
								22
								23
								24
								25 N
								26
								27
								28
								29
								30
								31
								32
								33 S
								34
								35
								36
								37
								38
								39 H
								40
								41


CARBIDE
HSS
i-ONE DRILLS
i-DREAM DRILLS
DREAM DRILLS -PRO
DREAM DRILLS -GENERAL
DREAM DRILLS -HIGH FEED
DREAM DRILLS -FLAT BOTTOM
DREAM DRILLS -INOX
DREAM DRILLS -ALU
DREAM DRILLS -MQL
DREAM DRILLS for HIGH HARDENED STEELS
GENERAL CARBIDE DRILLS
MULTI-1 DRILLS
HPD DRILLS
GOLD-P DRILLS
SUPER-GP DRILLS
STRAIGHT SHANK DRILLS
TAPER SHANK DRILLS
NC- SPOTTING DRILLS
CENTER DRILLS
SPADE DRILLS
REAMERS
COUNTER SINKS
COUNTER BORES
TECHNICAL DATA



D5303 SERIES

CARBIDE, CENTER DRILLS / FORM A

- VOLLHARTMETALL, ZENTRIERBOHRER / FORM A
- Forets carbure à centrer / Forme A
- PUNTE A CENTRARE IN MD / FORMA A

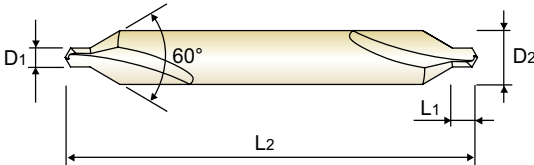

DIN 333

CARBIDE

h8

k12

120°

Bright


p.A297

	Plain Shank	Page
	⊙ NC DRILL CHUCK & OTHER TOOL HOLDERS	D247 - 256
	○ ER COLLET CHUCK	D73 - 115

FORM A (60°)

Unit : mm

EDP No.	Drill Diameter	Shank Diameter	Pilot Length	Overall Length
	D1	D2	L1	L2
D5303010	1.0	3.15	1.3	31.5
D5303912	1.25	3.15	1.6	31.5
D5303016	1.6	4	2	35.5
D5303020	2.0	5	2.5	40
D5303025	2.5	6.3	3.1	45
D5303931	3.15	8	3.9	50
D5303040	4.0	10	5	56
D5303050	5.0	12.5	6.3	63
D5303063	6.3	16	8	71



⊙ : Excellent ○ : Good

ISO	P										M					K				
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel					Stainless steel				
Material Description	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
VDI 3323	1	13	25	28	32	10	29	32	38	15	35	15	23	10	15	26	3	25	21	20
HRc	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommended	⊙	⊙	⊙			⊙	○					○			⊙	○	○		○	
ISO	N										S					H				
	Aluminum-wrought alloy					Aluminum-cast, alloyed					Copper and Copper Alloys (Bronze / Brass)					Non Metallic Materials				
Material Description	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40
HRc	60	100	75	90	130	110	90	100			15	30	25	38	34	55	60	42	55	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400Rm	1050Rm	550	630	400
Recommended																				

A290 phone:+82-32-526-0909, www.yg1.kr, E-mail:yg1@yg1.kr

YG YG-1 CO., LTD.




DV303 SERIES

DV333 SERIES

HSS-E, CENTER DRILLS / FORM A

- HSS-EX, ZENTRIERBOHRER / FORM A
- Forets HSS-EX à centrer / Forme A
- PUNTE A CENTRARE PER TORNII IN HSS-EX / FORMA A

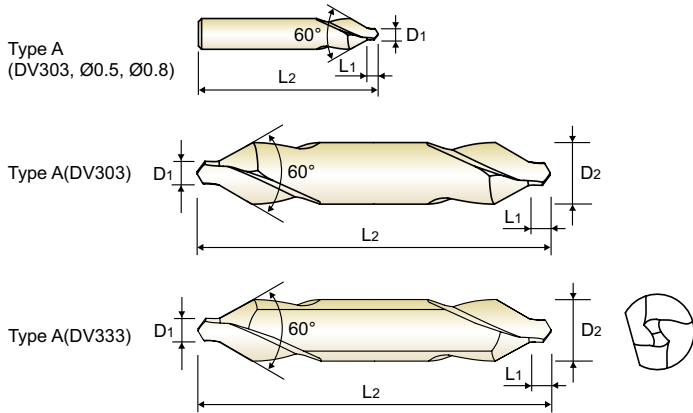

DIN 333

HSS-E

h8

k12

120°

Bright

p.A297

	Plain Shank	Page
	⊙ NC DRILL CHUCK & OTHER TOOL HOLDERS	D247 - 256
	○ ER COLLET CHUCK	D73 - 115

FORM A (60°)


EDP No.	Drill Diameter	Shank Diameter	Pilot Length	Overall Length
	D1	D2	L1	L2
DV303005	0.5	3.15	0.8	25
DV303008	0.8	3.15	1.1	25
DV303010	1.0	3.15	1.3	31.5
DV303912	1.25	3.15	1.6	31.5
DV303016	1.6	4	2	35.5
DV303020	2.0	5	2.5	40
DV303025	2.5	6.3	3.1	45
DV303931	3.15	8	3.9	50
DV303040	4.0	10	5	56
DV303050	5.0	12.5	6.3	63
DV303063	6.3	16	8	71

► Under 1.0mm : Single End

FORM A (60°), FLAT

Unit : mm

EDP No.	Drill Diameter	Shank Diameter	Pilot Length	Overall Length
	D1	D2	L1	L2
DV333016	1.6	4	2	35.5
DV333020	2.0	5	2.5	40
DV333025	2.5	6.3	3.1	45
DV333931	3.15	8	3.9	50
DV333040	4.0	10	5	56
DV333050	5.0	12.5	6.3	63
DV333063	6.3	16	8	71



⊙ : Excellent ○ : Good

ISO	P										M					K				
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel					Stainless steel				
Material Description	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
VDI 3323	1	13	25	28	32	10	29	32	38	15	35	15	23	10	15	26	3	25	21	20
HRc	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommended	⊙	⊙	○			⊙	○					○			⊙	○	○		○	
ISO	N										S					H				
	Aluminum-wrought alloy					Aluminum-cast, alloyed					Copper and Copper Alloys (Bronze / Brass)					Non Metallic Materials				
Material Description	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40
HRc	60	100	75	90	130	110	90	100			15	30	25	38	34	55	60	42	55	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400Rm	1050Rm	550	630	400
Recommended																				

YG YG-1 CO., LTD.

phone:+82-32-526-0909, www.yg1.kr, E-mail:yg1@yg1.kr

A291

CARBIDE

HSS

CENTER
DRILLS

DV334 SERIES

HSS-E, CENTER DRILLS EXTRA LONG / FORM A

🇩🇪 HSS-EX, ZENTRIERBOHRER / FORM A

🇫🇷 Forets HSS-EX à centrer / Forme A, série extra-longue

🇮🇹 PUNTE A CENTRARE PER TORNII IN HSS-EX / FORMA A

CARBIDE

HSS

CENTER
DRILLS

D1303 SERIES

D1343 SERIES

HSS, CENTER DRILLS / FORM A

🇩🇪 HSS, ZENTRIERBOHRER / FORM A

🇫🇷 Forets HSS à centrer / Forme A

🇮🇹 PUNTE A CENTRARE PER TORNII IN HSS / FORMA A

Type A(DV334)

D₁

60°

L₂

L₁

D₂

HSS-E

h8

k12

120°

Bright

p.A297

Recommended ToolHolder

Plain Shank

NC DRILL CHUCK & OTHER TOOL HOLDERS

ER COLLET CHUCK

Page

D247 - 256

D73 - 115

Type A(D1303)

D₁

60°

L₂

L₁

D₂

Type A(D1343)

D₁

60°

L₂

L₁

D₂

DIN 333

HSS

h8

k12

120°

Bright

p.A297

Recommended ToolHolder

Plain Shank

NC DRILL CHUCK & OTHER TOOL HOLDERS

ER COLLET CHUCK

Page

D247 - 256

D73 - 115

EXTRA LONG / FORM A (60°)

Unit : mm

EDP No.	Drill Diameter	Shank Diameter	Pilot Length	Overall Length
	D ₁	D ₂	L ₁	L ₂
DV334010	1.0	4	1.3	120
DV334016	1.6	5	2	120
DV334020	2.0	6	2.5	120
DV334025	2.5	8	3.1	120
DV334931	3.15	10	3.9	120
DV334040	4.0	12	5	120
DV334050	5.0	14	6.3	120

60°

FORM A (60°)

Unit : mm

EDP No.	Drill Diameter	Shank Diameter	Pilot Length	Overall Length
	D ₁	D ₂	L ₁	L ₂
D1303005	0.5	3.15	0.8	25
D1303008	0.8	3.15	1.1	25
D1303010	1.0	3.15	1.3	31.5
D1303912	1.25	3.15	1.6	31.5
D1303016	1.6	4	2	35.5
D1303020	2.0	5	2.5	40
D1303025	2.5	6.3	3.1	45
D1303931	3.15	8	3.9	50
D1303040	4.0	10	5	56
D1303050	5.0	12.5	6.3	63
D1303063	6.3	16	8	71
D1303080	8.0	20	10.1	80
D1303100	10.0	25	12.8	100

LEFT HELIX / FORM A (60°)

Unit : mm

◎ : Excellent ○ : Good

ISO	P										M					K				
Material Description	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel					Stainless steel				
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRc	125	13	25	28	32	10	29	32	38	15	35	15	23	10	26	3	25	21	21	21
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommended	◎	◎	○			◎	○				○				◎	○	○		○	

ISO	N										S					H				
Material Description	Aluminum-wrought alloy					Aluminum-cast, alloyed					Copper and Copper Alloys (Bronze / Brass)					Non Metallic Materials				
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40
HRc	60	100	75	90	130	110	90	100			15	30	25	38	34	55	60	42	55	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400Rm	1050Rm	550	630	400
Recommended																				

◎ : Excellent ○ : Good

ISO	P										M					K				
Material Description	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel					Stainless steel				
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRc	125	13	25	28	32	10	29	32	38	15	35	15	23	10	26	3	25	21	21	21
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommended	◎	◎	○			◎	○				○				◎	○	○		○	

ISO	N										S					H				
Material Description	Aluminum-wrought alloy					Aluminum-cast, alloyed					Copper and Copper Alloys (Bronze / Brass)					Non Metallic Materials				
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40
HRc	60	100	75	90	130	110	90	100			15	30	25	38	34	55	60	42	55	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400Rm	1050Rm	550	630	400
Recommended																				

CARBIDE

HSS

i-ONE
DRILLS

i-DREAM
DRILLS

DREAM
DRILLS
-PRO

DREAM
DRILLS
-GENERAL

DREAM
DRILLS
-HIGH FEED

DREAM
DRILLS
-FLAT BOTTOM

DREAM
DRILLS
-INOX

DREAM
DRILLS
-ALU

DREAM
DRILLS
-MQL

DREAM DRILLS
for HIGH
HARDENED STEELS

GENERAL
CARBIDE
DRILLS

MULTI-1
DRILLS

HPD
DRILLS

GOLD-P
DRILLS

SUPER-GP
DRILLS

STRAIGHT
SHANK
DRILLS

TAPER SHANK
DRILLS

NC-
SPOTTING
DRILLS

CENTER
DRILLS

SPADE
DRILLS

REAMERS

COUNTER
SINKS

COUNTER
BORES

TECHNICAL
DATA



D1313 SERIES


D1353 SERIES

HSS, CENTER DRILLS / FORM B

🇩🇪 HSS, ZENTRIERBOHRER / FORM B

🇫🇷 Forets HSS à centrer / Forme B

🇮🇹 PUNTE A CENTRARE PER TORNII IN HSS / FORMA B

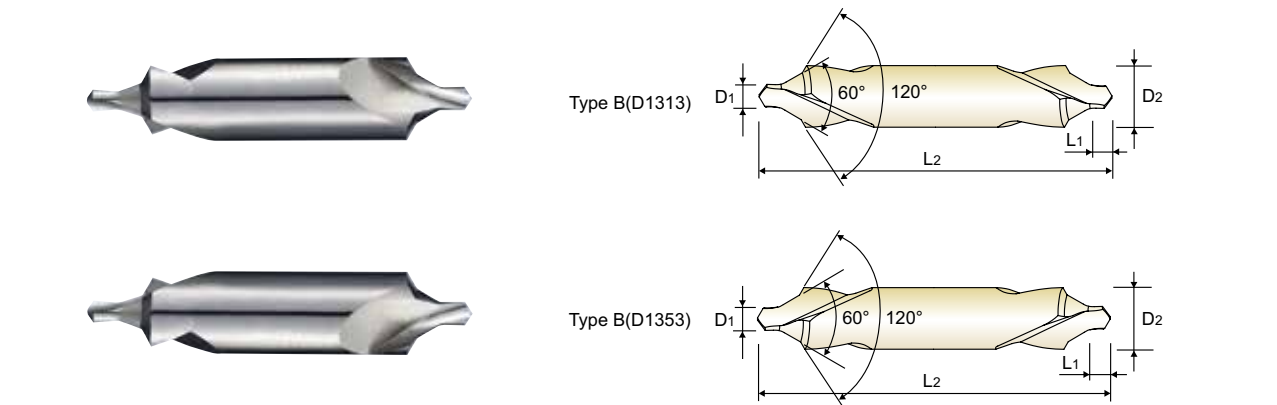

DIN 333

HSS

h8

k12

120°

Bright

p.A297

Plain Shank

NC DRILL CHUCK & OTHER TOOL HOLDERS


ER COLLET CHUCK

Page D247 - 256

Page D73 - 115

EDP No.	Drill Diameter	Shank Diameter	Pilot Length	Overall Length
	D1	D2	L1	L2
D1313010	1.0	4	1.3	35.5
D1313912	1.25	5	1.6	40
D1313016	1.6	6.3	2	45
D1313020	2.0	8	2.5	50
D1313025	2.5	10	3.1	55
D1313931	3.15	11.2	3.9	60
D1313040	4.0	14	5	67
D1313050	5.0	18	6.3	75
D1313063	6.3	20	8	80

EDP No.	Drill Diameter	Shank Diameter	Pilot Length	Overall Length
	D1	D2	L1	L2
D1353020	2.0	8	2.5	50
D1353025	2.5	10	3.1	55
D1353931	3.15	11.2	3.9	60
D1353040	4.0	14	5	67
D1353063	6.3	20	8	80



ISO	P										M					K				
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel					Stainless steel				
Material Description	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRc	125	13	25	28	32	10	29	32	38	15	35	15	23	10	10	26	3	25	21	21
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommended	⊙	⊙	○			⊙	○					○			⊙	○	○		○	
ISO	N										S					H				
	Aluminum-wrought alloy					Aluminum-cast, alloyed					Copper and Copper Alloys (Bronze / Brass)					Non Metallic Materials				
Material Description	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40
HRc	60	100	75	90	130	110	90	100			15	30	25	38	34	55	60	42	55	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400Rm	1050Rm	550	630	400
Recommended																				



D1363 SERIES


D1373 SERIES

HSS, CENTER DRILLS / FORM R

🇩🇪 HSS, ZENTRIERBOHRER / FORM R

🇫🇷 Forets HSS à centrer / Forme R

🇮🇹 PUNTE A CENTRARE PER TORNII IN HSS / FORMA R

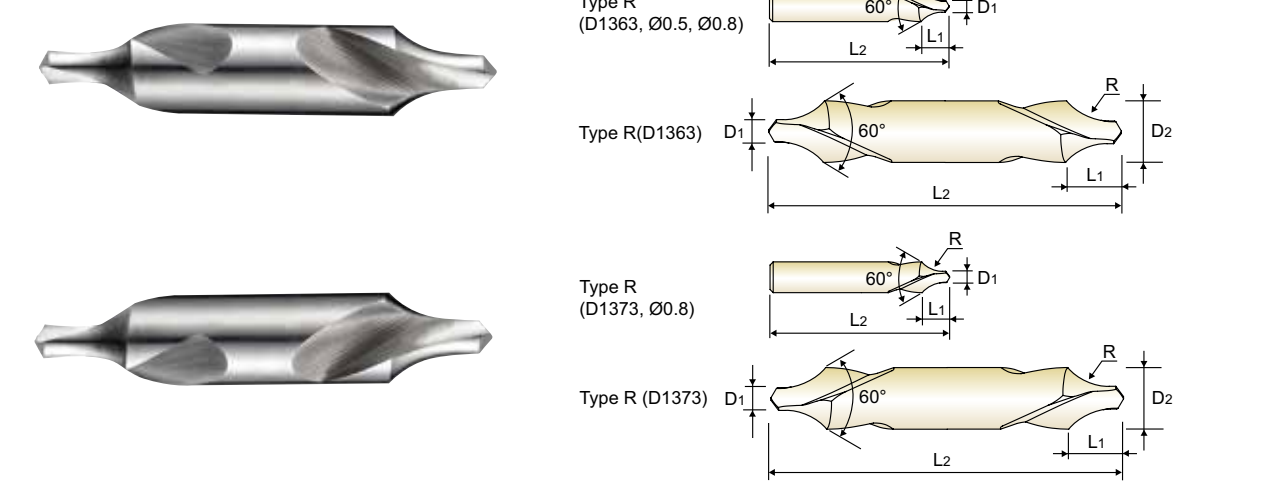

DIN 333

HSS

h8

k12

120°

Bright

p.A297

Plain Shank

NC DRILL CHUCK & OTHER TOOL HOLDERS

ER COLLET CHUCK

Page D247 - 256


Page D73 - 115

EDP No.	Drill Diameter	Shank Diameter	Pilot Length (Include Radius)	Overall Length	Radius
	D1	D2	L1	L2	R
D1363005	0.5	3.15	2.12	25	1.25
D1363008	0.8	3.15	2.65	25	2
D1363010	1.0	3.15	3	31.5	2.5
D1363912	1.25	3.15	3.35	31.5	3.15
D1363016	1.6	4	4.25	35.5	4
D1363020	2.0	5	5.3	40	5
D1363025	2.5	6.3	6.7	45	6.3
D1363931	3.15	8	8.5	50	8
D1363040	4.0	10	10.6	56	10
D1363050	5.0	12.5	13.2	63	12.5
D1363063	6.3	16	17	71	16
D1363080	8.0	20	21.2	80	20

► Under 1.0mm : Single End

EDP No.	Drill Diameter	Shank Diameter	Pilot Length (Include Radius)	Overall Length	Radius
	D1	D2	L1	L2	R
D1373008	0.8	3.15	2.65	25	2
D1373010	1.0	3.15	3	31.5	2.5
D1373912	1.25	3.15	3.35	31.5	3.15
D1373016	1.6	4	4.25	35.5	4
D1373020	2.0	5	5.3	40	5
D1373025	2.5	6.3	6.7	45	6.3
D1373931	3.15	8	8.5	50	8
D1373040	4.0	10	10.6	56	10
D1373050	5.0	12.5	13.2	63	12.5

► Under 1.0mm : Single End



ISO	P										M					K				
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel					Stainless steel				
Material Description	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRc	125	13	25	28	32	10	29	32	38	15	35	15	23	10	10	26	3	25	21	21
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommended	⊙	⊙	○			⊙	○					○			⊙	○	○		○	
ISO	N										S					H				
	Aluminum-wrought alloy					Aluminum-cast, alloyed					Copper and Copper Alloys (Bronze / Brass)					Non Metallic Materials				
Material Description	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40
HRc	60	100	75	90	130	110	90	100			15	30	25	38	34	55	60	42	55	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400Rm	1050Rm	550	630	400
Recommended																				

